


NOTE 2. Model Designation.

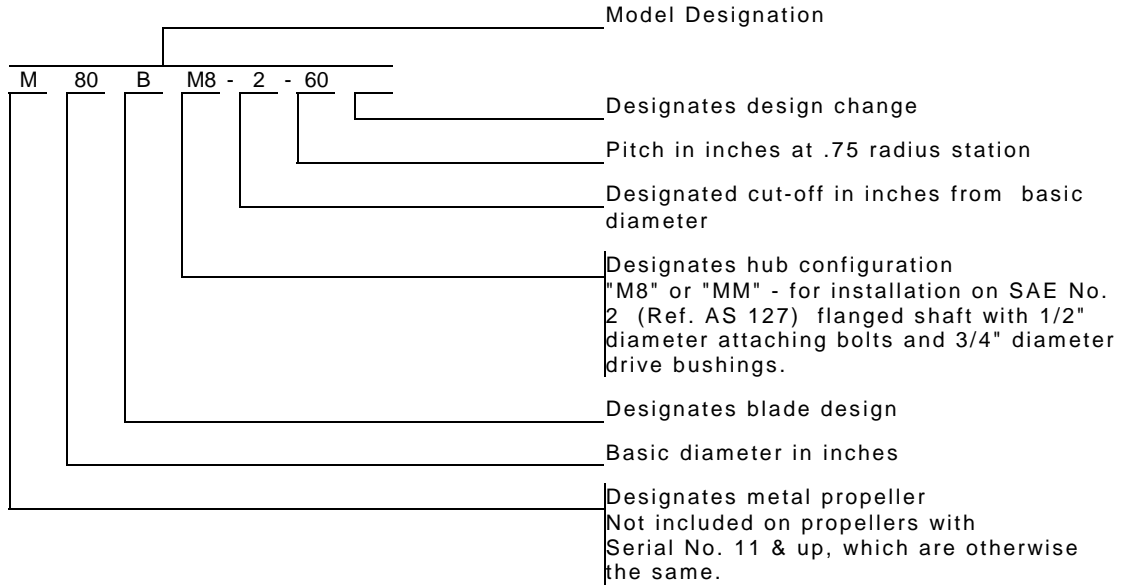

NOTE 3, 4, 5, 6, 7, and 8. Not applicable.

NOTE 9. Special Limits. Table of Propeller-Engine Combinations
Approved Vibrationwise for Use on Normal Category Single-Engine Tractor Aircraft

The maximum and minimum propeller diameters that can be used from a vibration standpoint are shown below. No reduction below the minimum diameter listed is permissible since this figure includes the diameter reduction allowable for repair purposes.

Propeller Model	Engine Model	Max. Dia. (Inches)	Min. Dia. (Inches)	Placards
80BM8	Lycoming O-540-B4B5 235 h.p. @ 2575 r.p.m. or less.	80	78	None

NOTE 10. Special Notes. The work "eligible" as used herein does not signify approval. For approval, compliance with the applicable aircraft airworthiness requirements is necessary.

... END ...