

TYPE CERTIFICATE DATA SHEET NO. P886

Propellers of models described herein conforming with this data sheet (which is part of Type Certificate No. P886) and other approved data on file with the Federal Aviation Administration, meet the minimum standards for use in certificated aircraft in accordance with pertinent aircraft data sheets and applicable portions of the Federal Aviation Regulations provided they are installed, operated and maintained as prescribed by the approved manufacturer's manuals and other approved instructions.

Type Certificate Holder Sensenich Propeller Manufacturing Company, Inc.
 14 Citation Lane
 Lititz, PA 17543

Type Fixed-Pitch Metal
 Material Aluminum Alloy
 Number of Blades Two


Basic Model (See Note 2)	Takeoff & Max. Cont.		Diameter	Standard Pitch	Hub Drilling			Hub Dimensions		Weight (lb.) (Max. Dia.)
	HP	RPM			No. Holes	Dia. Holes	Dia. Bolt Circle	Dia.	Thick.	
	74DM6	165			2800	74"	68"-48"	6	25/64"	
74DM7	165	2800	74"	68"-48"	6	29/64"	4-3/4"	6"	3-7/16	32.4
Deleted December 14, 1995, See Note 2										
Deleted December 14, 1995, See Note 2										
74DR	165	2800	74"	68"-48"	8	25/64"	5-1/4"	6-1/2"	3-7/16	29.5
Deleted December 14, 1995, See Note 2										
74DC	165	2800	74"	68"-50"	6	33/64"	4"	5-1/2"	3-7/16	31.1
Deleted December 14, 1995, See Note 2										

Certification Basis CAR 14 effective March 5, 1952, as amended by 14-1 effective May 16, 1953. Type Certificate No. 886 issued June 29, 1954, revised April 9, 1959. Date of application for Type Certificate April 27, 1954.

Production Basis Production Certificate No. 1NE

- NOTE 1. Installation. These models are for installation on flanged propeller shaft ends (see NOTE 2). Installation is to be made with special steel bolts which are furnished or specified by the propeller manufacturer in accordance with the appropriate propeller assembly drawing. See NOTE 7 for spacer designations and NOTE 9 for approved spacer lengths.
- a. Propeller Model 74DC is installed on SAE ARP-502 flanged shaft.
 - b. Propeller Model 74DR is installed on SAE No. 3 flanged shaft.
 - c. Propeller Model 74DM6 is installed on SAE No. 2 flanged shaft with 3/8 inch diameter attaching bolts and 5/8 inch diameter drive bushings.
 - d. Propeller Model 74DM7 is installed on SAE No. 2 flanged shaft with 7/16 inch diameter attaching bolts and 5/8 inch diameter drive bushings.

NOTE 2. Model Designation.

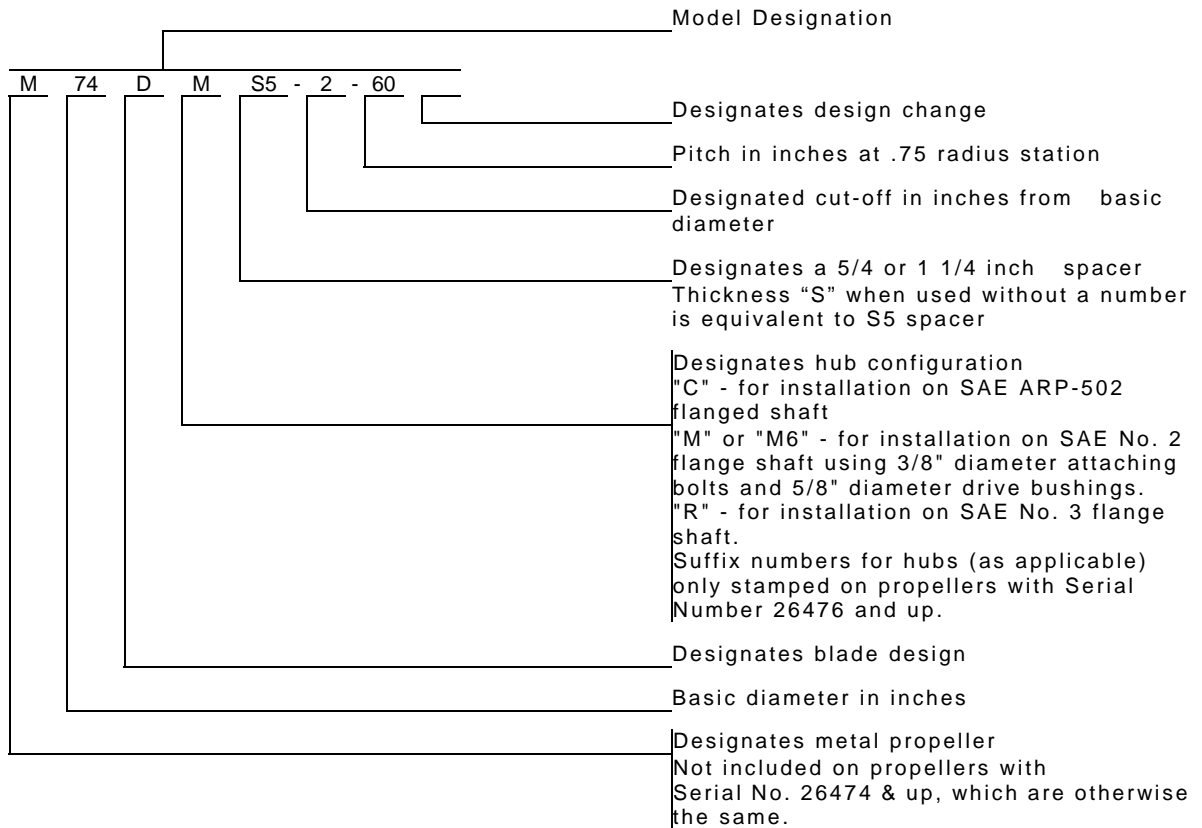

NOTE 3, 4, 5, 6, and 8. Not applicable.

NOTE 7. Spacers. Sensenich spacer models are identified by flange codes (see NOTE 2) and spacer thickness designated based on multiples of 1/4 inch. See NOTE 9 for approved spacer lengths.

NOTE 9. Special Limits. Table of Propeller-Engine Combinations
Approved Vibrationwise for Use on Normal Category Single-Engine Tractor Aircraft

The maximum and minimum propeller diameters that can be used from a vibration standpoint are shown below. No reduction below the minimum diameter listed is permissible since this figure includes the diameter reduction allowable for repair purposes.

Propeller Model	Engine Model	Max. Dia. (Inches)	Min. Dia. (Inches)	Placards
74DM6, 74DM7 Spacers 0 to 3.5 inches incl.	Lycoming O-320 Series 160 h.p. @ 2700 r.p.m. or less.	74	72	None
74DM6, 74DM7 Spacers 0 to 3.5 inches incl.	Lycoming O-290-D, -D2, and -D2B Series	74	72	None
74DC	Franklin 6A4-150-B4	74	72	Avoid continuous operation between 2150 & 2250 r.p.m. on ground and in flight
74DR	Franklin 6A4-165-B3	74	72	Avoid continuous operation between 2150 & 2250 r.p.m. on ground and in flight

NOTE 9. (Con't)

74DC	Franklin 6A4-165-B4	74	72	Avoid continuous operation between 2150 & 2250 r.p.m. on ground and in flight
74DR-1	Continental C-125-2	73	71	None
74DR	Continental C-145 Series and Continental O-300-A, -B, 145 h.p. @ 2700 r.p.m. or less.	74	72	None
74DC	Continental O-300-C, -D, and -E, 145 h.p. @ 2700 r.p.m. or less	74	72	None
74DC	Continental IO-346-A 165h.p. @ 2700 r.p.m. or less.	74	74	None

NOTE 10. Special Notes. The work "eligible" as used herein does not signify approval. For approval, compliance with the applicable aircraft airworthiness requirements is necessary.

... END ...